

Life Cycle Analyses

PMCLAS



Summary



01 | Methodology



02 | Results

01

Methodology

Environmental Impact Assessment

Functional unit

The functional unit is a quantified performance of a product system for use as a reference unit. One of the primary purposes of a functional unit is to provide a reference to which the input and output data are normalized (in a mathematical sense). Therefore, the functional unit shall be clearly defined and measurable.

Impact Indicator

The impact is measured through the "IPCC 2021 GWP100" method

Electricity impact calculation method

Following guidelines from the GHG Protocol, the impact of electricity is calculated using the location-based approach. This means that the emission factors used represent the average annual carbon intensity of the power grid in the country the processes take place in.

Life Cycle Analyses

Cradle to grave

Emission Factor Inventory


| Num | Emission Factor | Source | Value | Unit |
|-----|--|-------------------|---------------|------|
| 1 | market for cement, Portland | ECOINVENT 3.10 | 0.944058408 | kg |
| 2 | Steel, low-alloyed Ordinary transforming activity | ECOINVENT 3.10 | 2.203301567 | kg |
| 3 | Polypropylene, granulate Market activity | ECOINVENT 3.10 | 3.516196993 | kg |
| 4 | Acrylonitrile-butadiene-styrene copolymer Ordinary transforming activity | ECOINVENT 3.10 | 4.533718346 | kg |
| 5 | Electricity Total (Scope 2 & 3) People's Republic of China | IEA 2023 | 0.7231 | kWh |
| 6 | Freight Boat From CN to FR | WELOW EXPERTS 1.0 | 0.25227278 | kg |
| 7 | Waste reinforcement steel Ordinary transforming activity Waste | ECOINVENT 3.10 | 0.06273427595 | kg |
| 8 | polyethylene/polypropylene product Ordinary transforming activity | ECOINVENT 3.10 | 1.783532575 | kg |
| 9 | transforming waste cement-fibre slab, dismantled, municipal incineration | ECOINVENT 3.10 | 0.015293826 | kg |
| 10 | Residues, MSWI, waste plastic, consumer electronics Ordinary transforming activity | ECOINVENT 3.10 | 0.3620299477 | kg |

02

Results

Coat stand

Climate Change

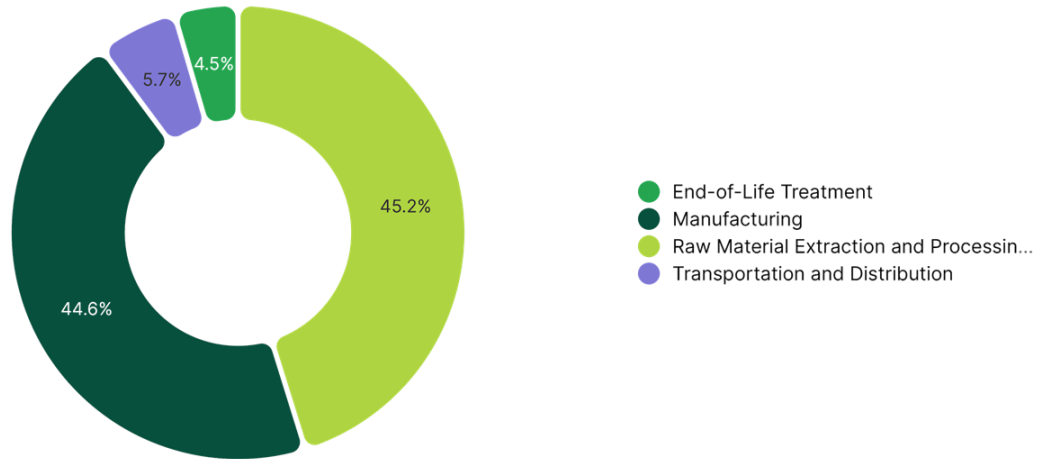


- End-of-Life Treatment
- Manufacturing
- Raw Material Extraction and Processin...
- Transportation and Distribution

| Step | Impact (kg CO ₂ eq) | Percentage (%) |
|--|-----------------------------------|-------------------|
| Raw Material Extraction and Processing | 16.92 | 46.48 % |
| Manufacturing | 16.19 | 44.47 % |
| Transportation and Distribution | 2.02 | 5.54 % |
| End-of-Life Treatment | 1.28 | 3.51 % |
| | | |
| TOTAL | 36,41 | 100.00 % |

Coat stand


Climate Change - Raw Material Extraction and Processing

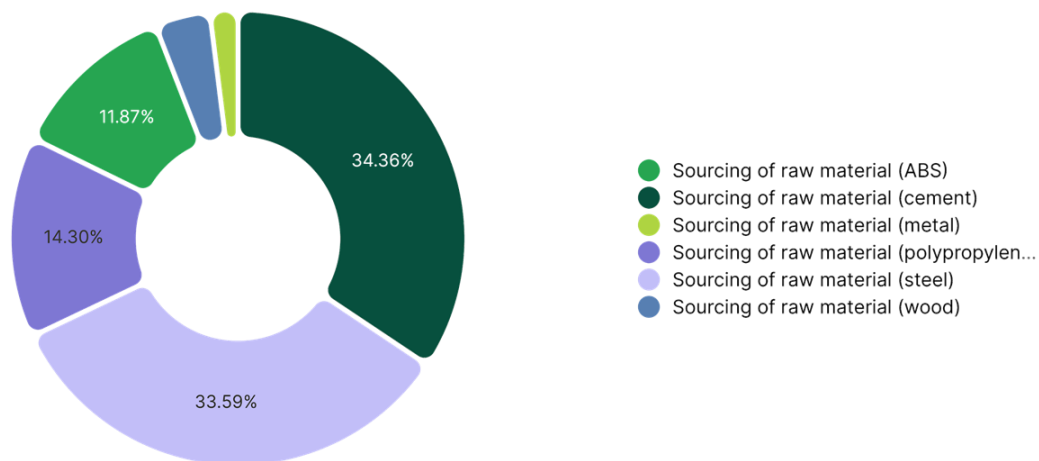

| Activity | Emission Factor Num | Quantity | Impact (kg CO ₂ eq) | Percentage (%) |
|--|---------------------------|----------|-----------------------------------|-------------------|
| Sourcing of raw material (cement) | 1 | 6.84 | 6.46 | 38.16 % |
| Sourcing of raw material (steel) | 2 | 2.64 | 5.82 | 34.37 % |
| Sourcing of raw material (ABS) | 4 | 0.62 | 2.79 | 16.50 % |
| Sourcing of raw material (polypropylene) | 3 | 0.53 | 1.86 | 10.97 % |
| | | | | |
| | | | | |
| | | | | |
| TOTAL | | | 16.92 | 100.00 % |

Coat stand

Climate Change - Manufacturing

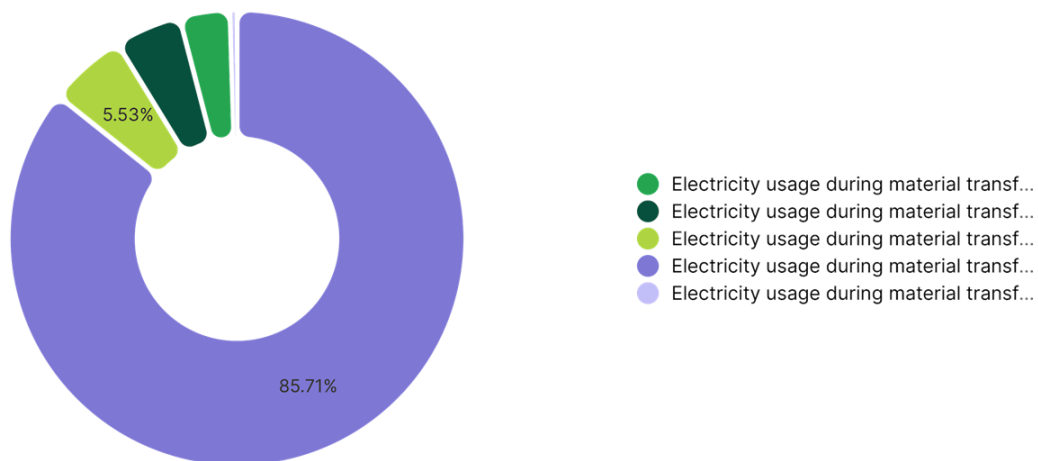

| Activity | Emission Factor Num | Quantity | Impact (kg CO ₂ eq) | Percentage (%) |
|--|---------------------|----------|--------------------------------|----------------|
| Electricity usage during material transformation (steel) | 5 | 20.27 | 14.65 | 90.52 % |
| Electricity usage during material transformation (ABS) | 5 | 1.14 | 0.83 | 5.11 % |
| Electricity usage during material transformation (polypropylene) | 5 | 0.98 | 0.71 | 4.38 % |
| | | | | |
| | | | | |
| | | | | |
| TOTAL | | | 16.19 | 100.00 % |

Coat stand


Climate Change - Transportation and Distribution



| Activity | Emission Factor Num | Quantity | Impact (kg CO ₂ eq) | Percentage (%) |
|----------|---------------------|----------|--------------------------------|----------------|
| Freight | 6 | 8 | 2.02 | 100.00 % |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| TOTAL | | | 2.02 | 100.00 % |

Coat stand

Climate Change - End-of-Life Treatment

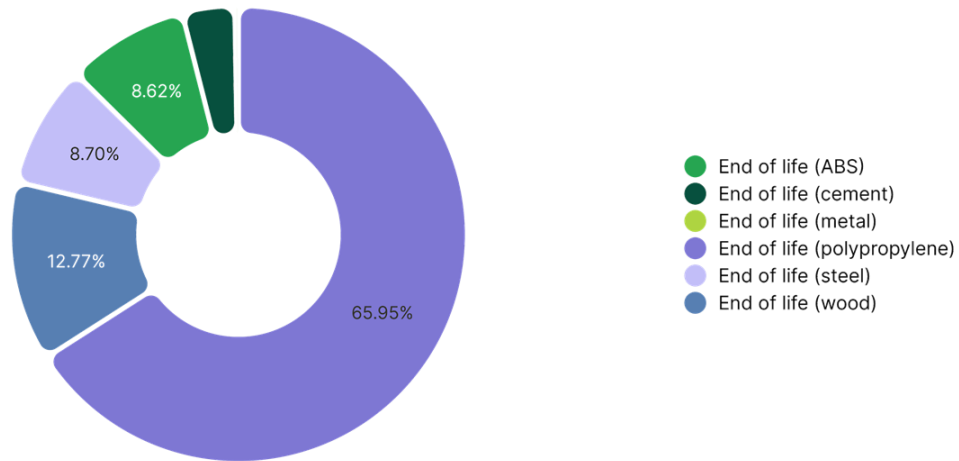

| Activity | Emission Factor Num | Quantity | Impact (kg CO ₂ eq) | Percentage (%) |
|-----------------------------|---------------------|----------|--------------------------------|----------------|
| End of life (polypropylene) | 8 | 0.48 | 0.86 | 66.93 % |
| End of life (ABS) | 10 | 0.56 | 0.2 | 15.85 % |
| End of life (steel) | 7 | 2.4 | 0.15 | 11.77 % |
| End of life (cement) | 9 | 4.56 | 0.07 | 5.45 % |

| | | | | |
|--|--|--|--|--|
| | | | | |
|--|--|--|--|--|

| | | | | |
|-------|--|--|------|----------|
| TOTAL | | | 1.28 | 100.00 % |
|-------|--|--|------|----------|

