

Life Cycle Analyses

DOORSTOP W



Summary



01 | Methodology



02 | Results

01

Methodology

Environmental Impact Assessment

Functional unit

The functional unit is a quantified performance of a product system for use as a reference unit. One of the primary purposes of a functional unit is to provide a reference to which the input and output data are normalized (in a mathematical sense). Therefore, the functional unit shall be clearly defined and measurable.

Impact Indicator

The impact is measured through the "IPCC 2021 GWP100" method

Electricity impact calculation method

Following guidelines from the GHG Protocol, the impact of electricity is calculated using the location-based approach. This means that the emission factors used represent the average annual carbon intensity of the power grid in the country the processes take place in.

Life Cycle Analyses

Cradle to grave

Emission Factor Inventory


Nu m	Emission Factor	Source	Value	Unit
1	Natural stone plate, cut Ordinary transforming activity	ECOINVENT 3.10	0.1200093679	kg
2	market for cement, Portland	ECOINVENT 3.10	0.944058408	kg
3	Synthetic rubber Ordinary transforming activity	ECOINVENT 3.10	2.877577391	kg
4	market for cast iron	ECOINVENT 3.10	1.93542914	kg
5	Electricity Total (Scope 2 & 3) People's Republic of China	IEA 2023	0.7231	kWh
6	Freight Boat From CN to FR	WELOW EXPERTS 1.0	0.25227278	kg
7	treatment of waste cement-fibre slab, dismantled, municipal incineration Residues, MSWI, waste rubber,	ECOINVENT 3.10	0.015293826	kg
8	unspecified Ordinary transforming activity	ECOINVENT 3.10	0.3380807553	kg
9	market for inert waste	ECOINVENT 3.10	0.015324362	kg
10	Waste disposal Metal Average	UK GHG CONVERSION FACTOR 2024	0.0191	kg

02

Results

Door stop


Climate Change

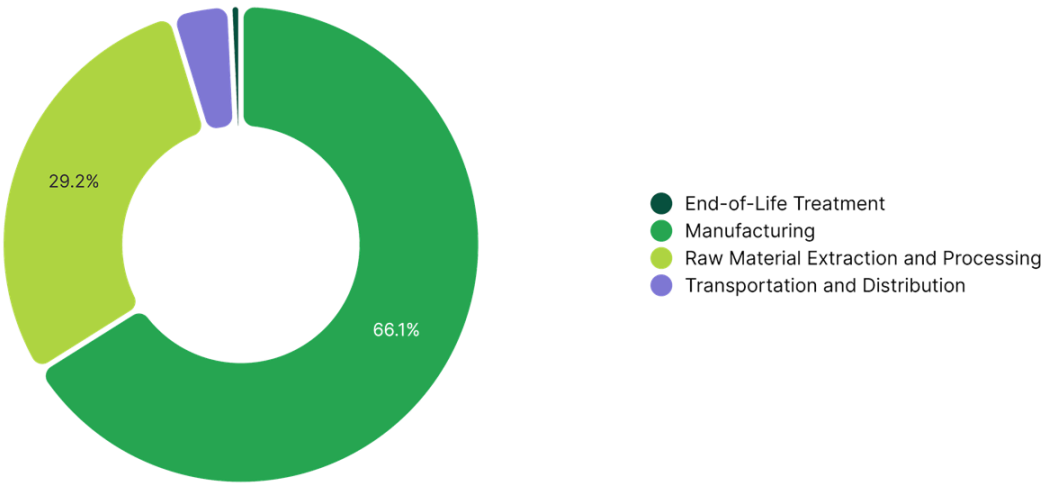

Step	Impact (kg CO ₂ eq)	Percentage (%)
Manufacturing	3.58	66.84 %
Raw Material Extraction and Processing	1.52	28.40 %
Transportation and Distribution	0.23	4.24 %
End-of-Life Treatment	0.03	0.51 %
TOTAL	5,35	100.00 %

Door stop

Climate Change - Raw Material Extraction and Processing

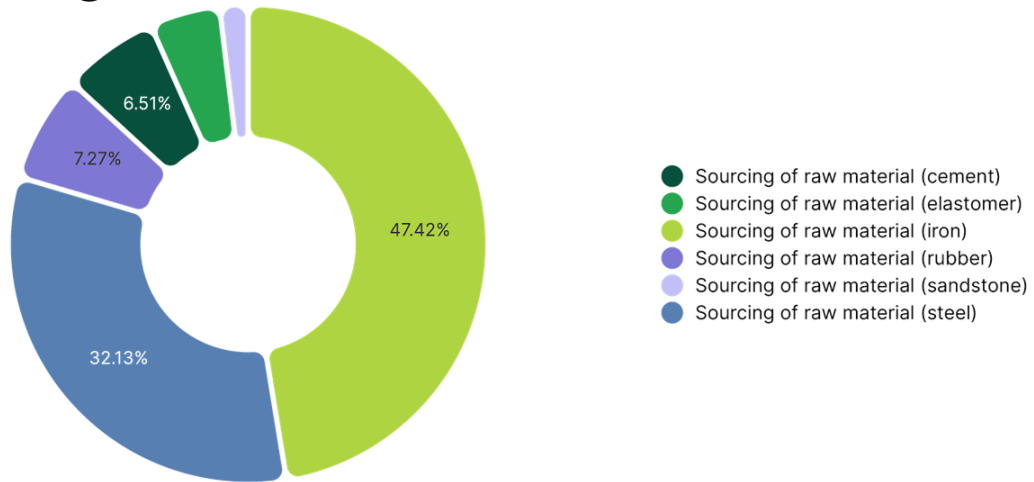


Activity	Emission Factor Num	Quantity	Impact (kg CO ₂ eq)	Percentage (%)
Sourcing of raw material (iron)	4	0.62	1.21	79.46 %
Sourcing of raw material (cement)	2	0.18	0.17	10.91 %
Sourcing of raw material (rubber)	3	0.04	0.11	7.50 %
Sourcing of raw material (sandstone)	1	0.27	0.03	2.13 %

--

TOTAL			1.52	100.00 %
-------	--	--	------	----------

Door stop


Climate Change - Manufacturing

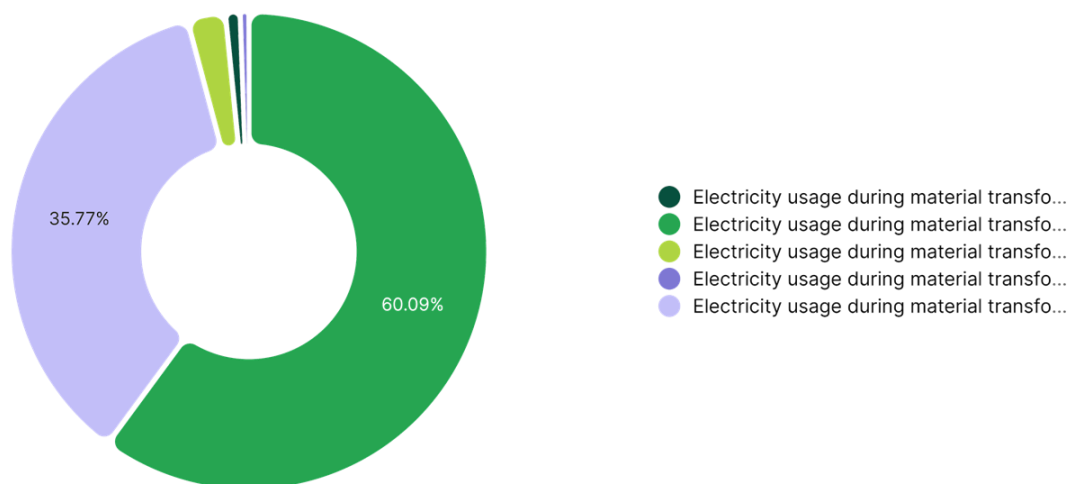

Activity	Emission Factor Num	Quantity	Impact (kg CO ₂ eq)	Percentage (%)
Electricity usage during material transformation (iron)	5	4.79	3.46	96.82 %
Electricity usage during material transformation (rubber)	5	0.13	0.09	2.55 %
Electricity usage during material transformation (sandstone)	5	0.03	0.02	0.63 %
TOTAL			3.58	100.00 %

Door stop


Climate Change - Transportation and Distribution

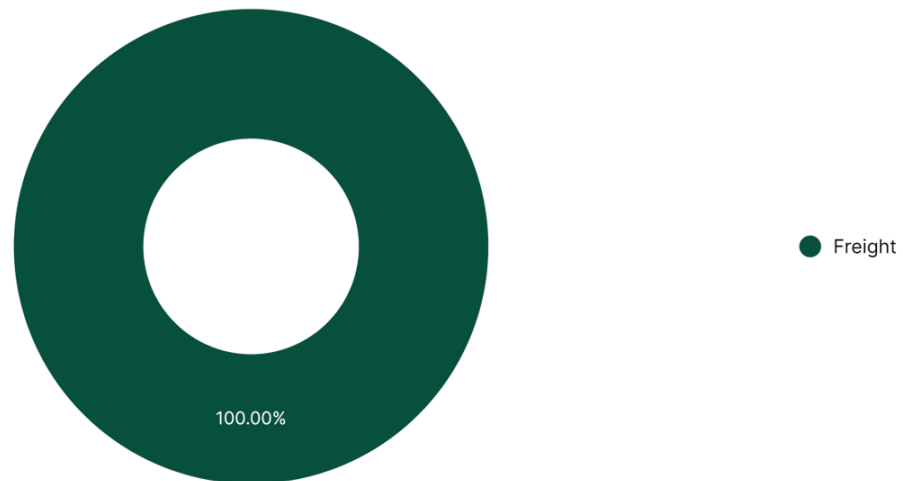

Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
Freight	6	0.9	227.05	100.00 %
TOTAL			227.05	100.00 %

Door stop

Climate Change - End-of-Life Treatment

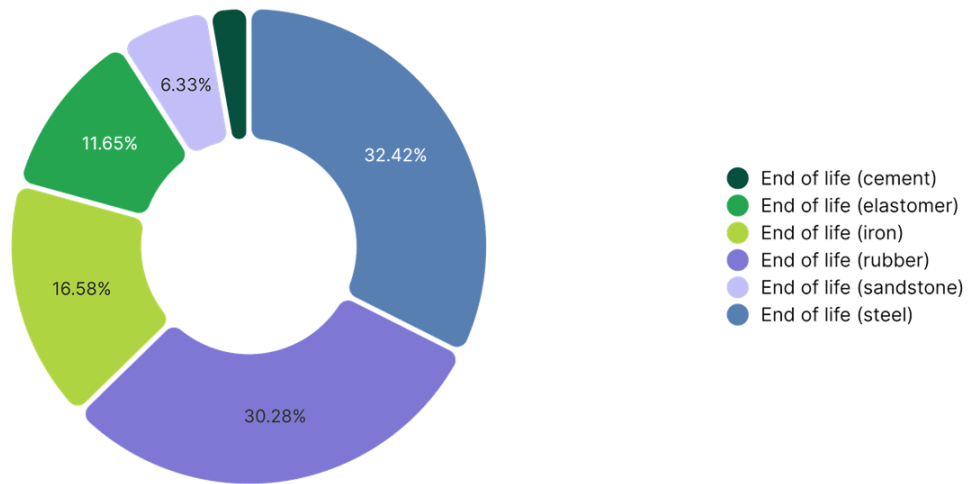

Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
End of life (rubber)	8	0.04	12.17	44.18 %
End of life (iron)	10	0.57	10.83	39.31 %
End of life (sandstone)	9	0.18	2.76	10.01 %
End of life (cement)	7	0.12	1.79	6.50 %

--

TOTAL			27.55	100.00 %
-------	--	--	-------	----------

