Life Cycle Analyses

PMMOBI





Summary



01 Methodology



02 Results





Methodology

Environmental Impact Assessment

Functional unit

The functional unit is a quantified performance of a product system for use as a reference unit. One of the primary purposes of a functional unit is to provide a reference to which the input and output data are normalized (in a mathematical sense). Therefore, the functional unit shall be clearly defined and measurable.

Impact Indicator

The impact is measured through the "IPCC 2021 GWP100" method

Electricity impact calculation method

Following guidelines from the GHG Protocol, the impact of electricity is calculated using the location-based approach. This means that the emission factors used represent the average annual carbon intensity of the power grid in the country the processes take place in.

Life Cycle Analyses

Cradle to grave





Emission Factor Inventory


Nu m	Emission Factor	Source	Value	Unit
1	Steel, low-alloyed Ordinary transforming activity	ECOINVENT 3.10	2.20330156 7	kg
2	Polypropylene, granulate Market activity	ECOINVENT 3.10	3.51619699 3	kg
3	Electricity Total (Scope 2 & 3) People's Republic of China	IEA 2023	0.7231	kWh
4	Freight Boat From CN to FR Waste	WELOW EXPERTS 1.0	O.2522727 8	kg
5	polyethylene/polypropylene product Ordinary	ECOINVENT 3.10	1.78353257 5	kg
6	transforming activity Waste reinforcement steel Ordinary transforming activity	ECOINVENT 3.10	0.0627342 7595	kg








Results



Climate Change

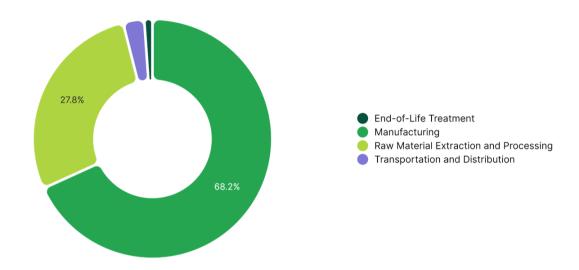


Step	Impact (kg CO ₂ eq)	Percentage (%)
Manufacturing	46.91	68.22 %
Raw Material Extraction and Processing	19.13	27.82 %
Transportation and Distribution	1.97	2.86 %
End-of-Life Treatment	0.76	1.10 %

TOTAL	68,76	100.00 %
TOTAL	68,76	100.00 %








Climate Change - Raw Material Extraction and




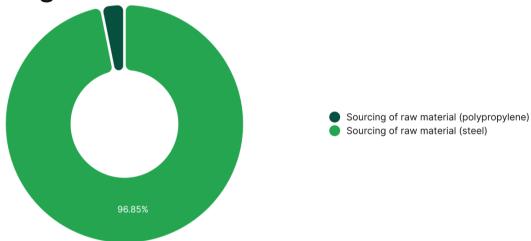


Activity	Emission Factor Num	Quantity	Impact (kg CO ₂ eq)	Percentage (%)
Sourcing of raw material (steel)	1	8.41	18.53	96.85 %
Sourcing of raw material (polypropylene)	2	0.17	0.6	3.15 %







Climate Change - Manufacturing

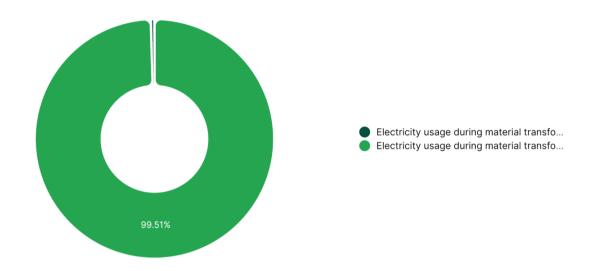


Activity	Emission Factor Num	Quantity	Impact (kg CO ₂ eq)	Percentage (%)
Electricity usage during material transformation (steel)	3	64.55	46.68	99.51 %
Electricity usage during material transformation (polypropylene)	3	0.32	0.23	0.49 %

TOTAL		46.91	100.00 %





Climate Change - Transportation and Distribution

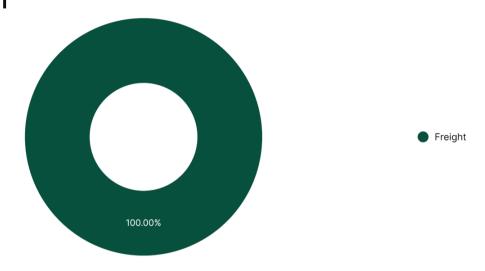


Activity	Emission Factor Num	Quantity	Impact (kg CO ₂ eq)	Percentage (%)
Freight	4	7.8	1.97	100.00 %

TOTAL 1.97 100.00 %





Climate Change - End-of-Life Treatment

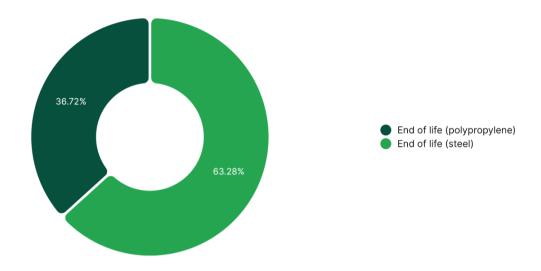

Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
End of life (steel)	6	7.64	479.54	63.28 %
End of life (polypropylene)	5	0.16	278.23	36.72 %

TOTAL		757.77	100.00 %





